

INSULATED ROLLING DOOR

# THERMISER<sup>®</sup> DOOR

Models ESD20 & ESD20W (operational wind-load)



## MAINTAIN TEMPERATURES AND REDUCE SOUND TRANSMISSION

### ENERGY-EFFICIENT CLIMATE CONTROL

Thermiser Insulated Rolling Doors, designed for exterior use, help maintain different temperatures on each side of the door. They are an ideal choice for use in environments that require climate control, security, and durability; distribution, industrial, hospitality, retail and more.

### PERFORMANCE

Thermiser doors roll up compactly, require little to no maintenance and deliver a low life cycle cost. It can be configured to meet a maximum operational windload of 20 PSF. We also warrant this door for 50,000 cycles as standard.

### SEAL THE BUILDING ENVELOPE


Foamed in place insulation offers superior protection against the elements, improved security and reduced sound transmission. The Thermiser helps seal the building envelope and keeps noise in or out.

### REDUCES SOUND TRANSMISSION

Sound Transmission Class (STC) rating is up to 30 for the curtain and up to 18 for the entire assembly. If an STC of 32 is desired, additional options are required. Please consult the factory for details. All configurations are evaluated per ASTM E90, based on testing a complete, operable assembly.

# INSULATED ROLLING DOOR **THERMISER® DOOR** Models ESD20 & ESD20W (operational wind-load)

## STANDARD COMPONENT MATERIALS AND FINISHES

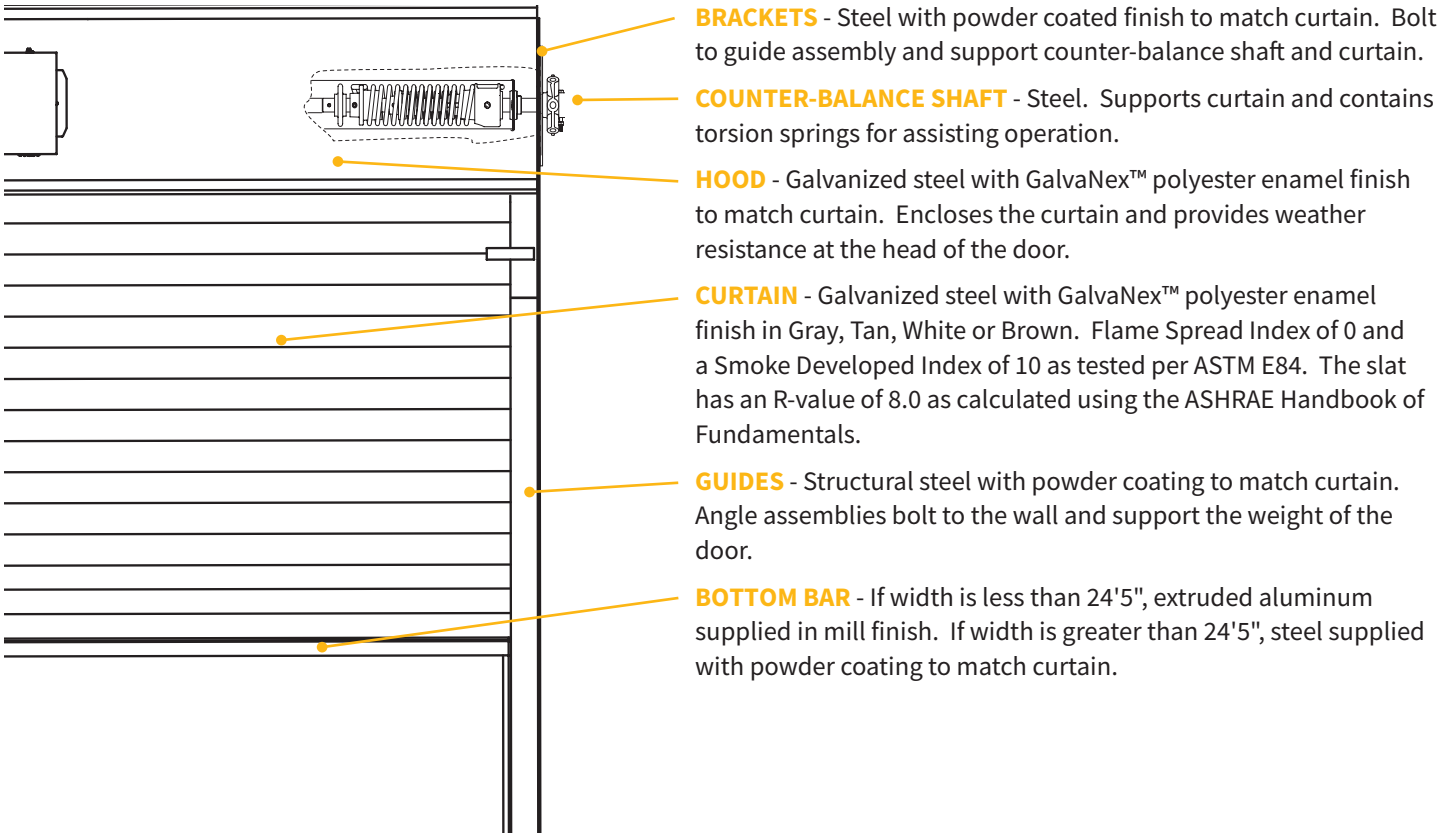

## OPERATION AND STRUCTURAL REQUIREMENTS

**Hand chain, hand crank and a variety of motor options are available.**

This product is supported by a guide assembly attached to the jamb construction. No additional header support is required unless hood supports are mandated by a larger opening width.

## OPTIONAL MATERIALS AND FINISHES

- ▶ Aluminum in mill, clear and color anodized
- ▶ Stainless steel - 300 series in #4 finish

### Brackets, Guides and Bottom Bar

- ▶ Hot-dip galvanizing on steel components
- ▶ Zinc-enriched, corrosion-resistant powder coating in Gray