



DSA Foam Dock Seal with Adjustable Head Pad

Product Specifications



DESIGN HIGHLIGHTS

- Adjustable head pad system operates utilizing an easy-release lever and has 48" working range to accommodate varying truck heights
- 18" high foam head pad is mounted on 10 ga. formed, painted steel which travels in slide tracks
- Adjustable spring-tension system provides for adjustment of counterbalance and horizontal tilt for smooth, jam-free operation
- Endurance-tested foam core is continuously bonded to frame surface with flexible, non-flammable adhesive.
- Roll-formed galvanized steel framing reduces pressure on building wall, 5 years warranty
- A wide selection of durable coated fabrics provide maximum durability
- Highly resilient, open-celled polyurethane foam keeps original shape and compresses easily to extend seal life
- Side pad bottoms are tapered to avoid pinching and wear
- All pads are vented for air and moisture release
- Full length yellow stripes guide drivers to the dock
- Heavy-duty, galvanized steel mounting brackets included

APPLICATION DATA

Door width: _____ ft. _____ in.
 Door height: _____ ft. _____ in.
 Dock height: _____ ft. _____ in.

Bumper protection*: _____ in.

(*Includes bumper projection and any building wall/foundation offset or cantilever)

TRUCKS AND TRAILERS SERVICED

Width: _____ Max. _____ Min.

Height: _____ Max. _____ Min.

Length: _____ Max. _____ Min.

Hydraulic tailgate: Yes No

Rear step section: Yes No

Tailgate/step section size: _____ in

Yard jockeys: Yes No

PROJECT INFORMATION

JOB NAME _____

ADDRESS _____

GENERAL CONTRACTOR _____

DISTRIBUTOR _____

QUANTITY _____


CERTIFIED FOR CONSTRUCTION

BY _____

COMPANY _____

ADDRESS _____

DATE _____

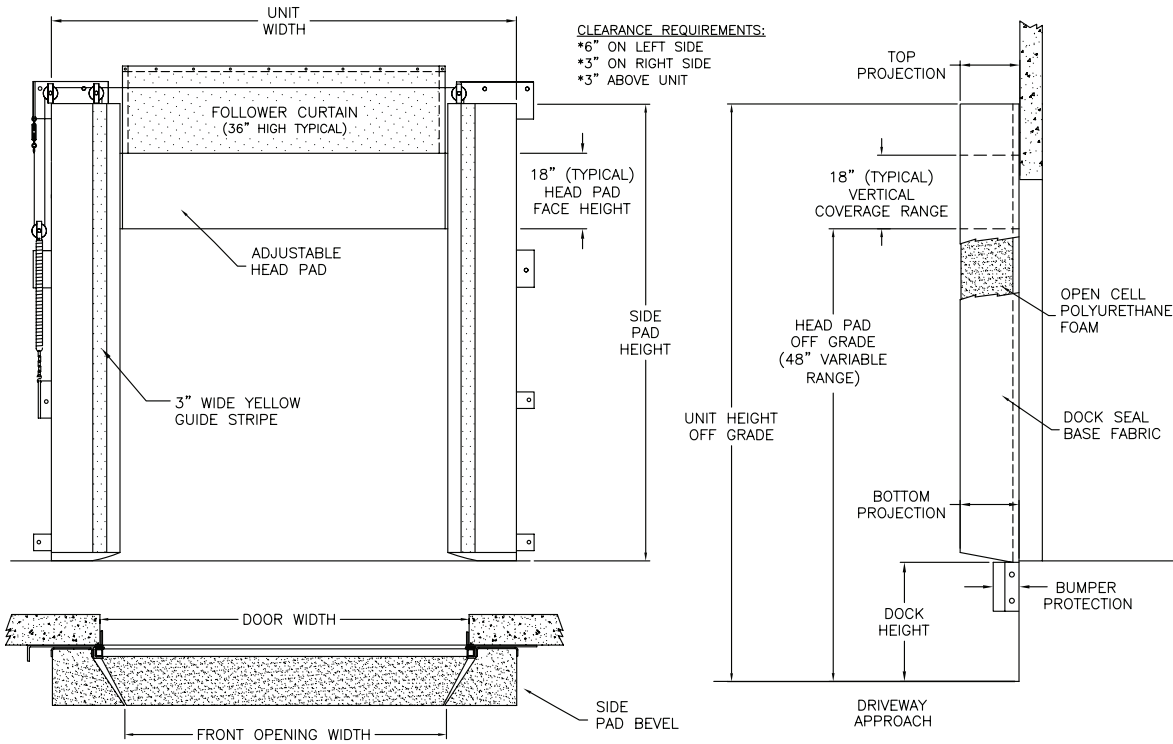

Quantity _____

Model: DSA

Distance to Outside of Side Pads: _____ (Total inches)

Side Pad Height: _____ (Total inches)

Side Pad Bevel: 12/12 6/10 8/12 10/12 10/15 8/15 12/15 10/18 6/14

Head Pad Bevel: 18/18

Base Material: 22 oz. vinyl 40 oz. vinyl 16 oz. CSM 40 oz. CSM TS-55®

Color: Black Tan Brown Blue Green

Taper: Tapered Non-Tapered

Top Projection: 8" 10" 12" 14" 16" 18" 20" 22" _____

Bottom Projection: 8" 10" 12" 14" 16" 18" 20" 22" _____

Bottom Flaps: None 3" 6" Inside Inside & front All 3 sides

Wear Surface: None Wear face Reinforced inside face Side pad 4" Side pad Head pad

Material: 22 oz. vinyl 40 oz. vinyl 40 oz. CSM TS-55®

Color: Black Tan Brown Blue Green

Wear Pleats: None WP4 WP8 WP16 Side pads

Material: 22 oz. vinyl 40 oz. vinyl 40 oz. CSM TS-55®

Color: Black Tan Brown Blue Green

Options: Door numbers Flame retardant fabric & foam Flame retardant fabric only Flame retardant foam only

Side Pad Mounting Brackets: None Flats & angles Angles 1 1/2" Offset flats & angles

*Conversions: To convert measurements to metric, see formulas below:

Inches x 25.4 = millimeters (Example: 4" x 25.4 = 101.6 mm)

Feet x .3048 = meters (Example: 12' x .3048 = 3.66 m)