



FOAMSIDE® Truck Shelter

Product Specifications

DESIGN HIGHLIGHTS

- Impactable foam-filled side members
- Roll-formed galvanized steel framing
- Fiberglass stays in side/head curtains
- Side curtains feature removable stays
- Translucent head member transmits light
- Raked header for moisture run-off
- Foam-filled draft pads
- Full range of fabrics and colors

APPLICATION DATA

Door width: _____ ft. _____ in.

Door height: _____ ft. _____ in.

Dock height: _____ ft. _____ in.

Bumper protection*: _____ in.

(*Includes bumper projection and any building wall/foundation offset or cantilever)

TRUCKS AND TRAILERS SERVICED

Width: _____ Max. _____ Min.

Height: _____ Max. _____ Min.

Length: _____ Max. _____ Min.

Hydraulic tailgate: Yes No

Rear step section: Yes No

Tailgate/step section size: _____ in

Yard jockeys: Yes No

PROJECT INFORMATION

JOB NAME _____

ADDRESS _____

GENERAL CONTRACTOR _____

DISTRIBUTOR _____

QUANTITY _____




CERTIFIED FOR CONSTRUCTION

BY _____

COMPANY _____

ADDRESS _____

DATE _____

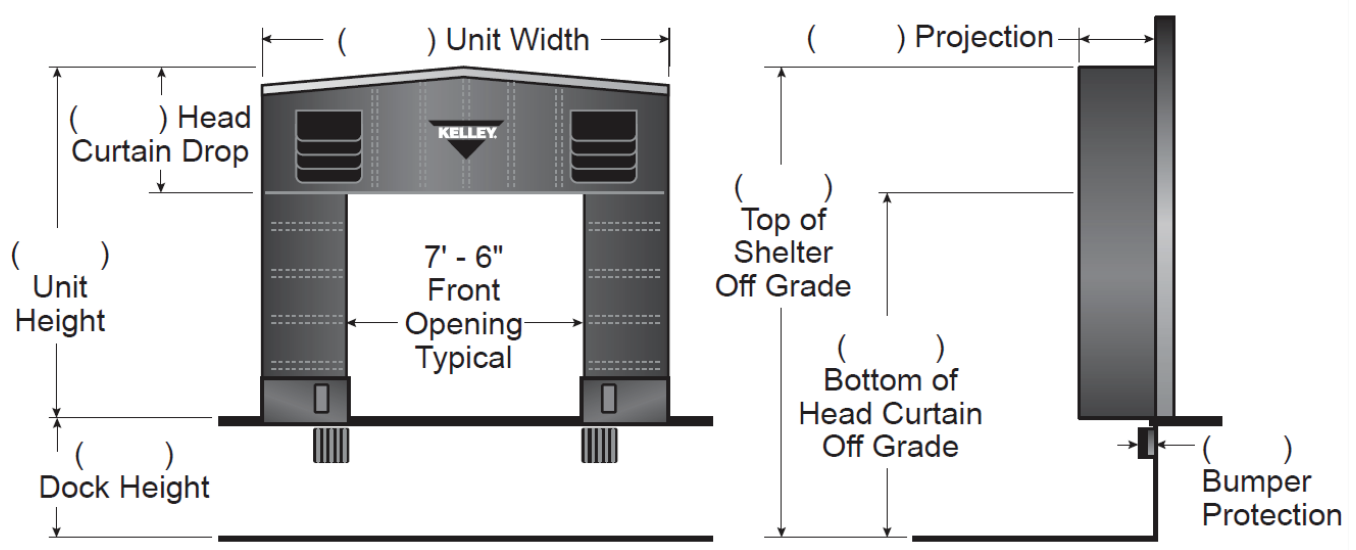

- Drive/Approach:** Level Incline Decline _____ % grade
- Building Wall Construction:** Metal Other
- Unit Width:** 11'6" 12'0" 12'6"
- Unit Height:** 11'0" 11'6" 12'0" 12'6"
- Head Member Style:** Raked Flat
- Curtain Material:** TS-55 40 oz. CSM 40 oz. vinyl 22 oz. vinyl
- Color:** Black Tan Brown Blue Green
- Head Curtain Drop:** 30" 36" 42" 48" 54" _____"
- Taper:** Yes No
- Top Projection:** 18" 20" 22" 24" 26" 28" 30" 36" 42" _____"
- Bottom Projection:** 18" 20" 22" 24" 26" 28" 30" 36" 42"
- Options:** None Door numbers Full length guide stripes Pull rope assembly

*Conversions: To convert measurements to metric, see formulas below:
 Inches x 25.4 = millimeters (Example: 4" x 25.4 = 101.6 mm)
 Feet x .3048 = meters (Example: 12' x .3048 = 3.66 m)